

SXA/SXB-2C/2C-X

PINOUT DIAGRAM


STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)

SYN - NA
 VID - NA

STATUS INDICATORS

1 - (CH.1) CC INPUT
 2 - (CH.2) CC INPUT
 3 - NA
 4 - NA
 5 - NA
 6 - NA
 7 - NA
 8 - NA
 9 - NA
 10 - NA
 11 - (CH.2) CC OUTPUT
 12 - (CH.1) CC OUTPUT

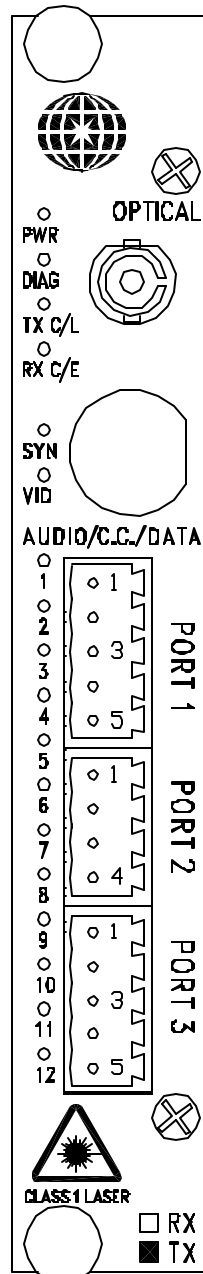

OPTICAL PORT (ST, FC)

CC INPUT (PORT 1)

1. (CH.1) GROUND
2. (CH.1) CC INPUT
3. (CH.2) GROUND
4. (CH.2) CC INPUT
5. GROUND

CC OUTPUT (PORT 2)

1. (CH.1) CC OUTPUT
2. (CH.1) CC OUTPUT
3. (CH.2) CC OUTPUT
4. (CH.2) CC OUTPUT