

SXA/SXB-2D/2D-X


PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER
 (GREEN)/ERROR (RED)

 SYN - NA
 VID - NA

DR1 - (CH.1) DATA OUTPUT
 DR2 - (CH.2) DATA OUTPUT
 AR1 - NA
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - (CH.2) DATA INPUT
 AT1 - NA
 AT2 - NA
 CT1 - NA
 CT2 - NA

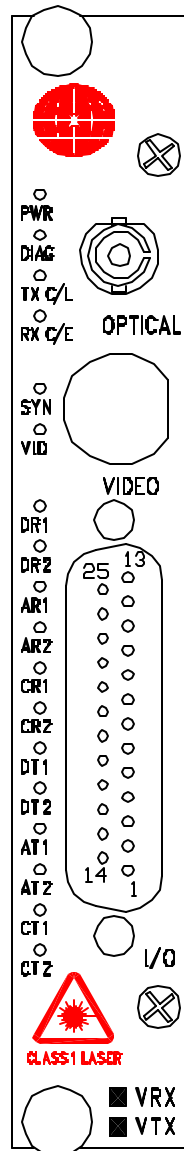

OPTICAL PORT (ST, FC)

DATA INPUT/OUTPUT
(DB-25 FEMALE)

4. (CH.1) RS232 INPUT
2. (CH.2) RS232 INPUT
5. (CH.1) RS232 OUTPUT
3. (CH.2) RS232 OUTPUT
1. GND
7. GND