


SXA/SXB-2F/2F-X

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - CARD DIAGNOSTIC*
 (GREEN-OK, RED-ALARM)
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER
 (GREEN)/ERROR (RED)
 SYN - NA
 VID - NA

DR1 - (CH.1) DATA OUTPUT
 DR2 - (CH.2) DATA OUTPUT
 AR1 - NA
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - (CH.2) DATA INPUT
 AT1 - NA
 AT2 - NA
 CT1 - NA
 CT2 - NA

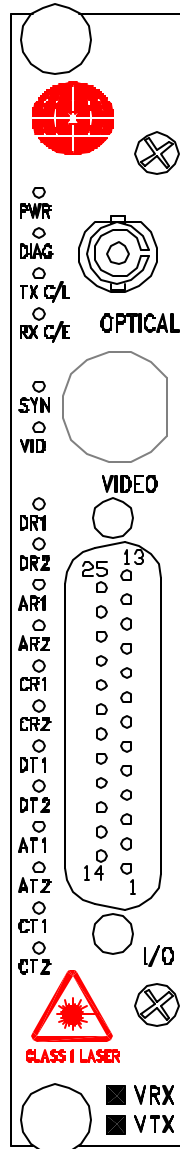

OPTICAL PORT (ST, FC)

DATA INPUT/OUTPUT (DB-25 FEMALE)

- 4. (CH.1) RS422 INPUT-
- 16. (CH.1) RS422 INPUT+
- 2. (CH.2) RS422 INPUT-
- 14. (CH.2) RS422 INPUT+
- 5. (CH.1) RS422 OUTPUT-
- 17. (CH.1) RS422 OUTPUT+
- 3. (CH.2) RS422 OUTPUT-
- 15. (CH.2) RS422 OUTPUT+
- 1. GND
- 7. GND