


SXA/SXB-2G/2G-X

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER
 (GREEN)/ERROR (RED)
 SYN - NA
 VID - NA

DR1 - (CH.1) DATA OUTPUT
 DR2 - (CH.2) DATA OUTPUT
 AR1 - NA
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - (CH.2) DATA INPUT
 AT1 - NA
 AT2 - NA
 CT1 - NA
 CT2 - NA

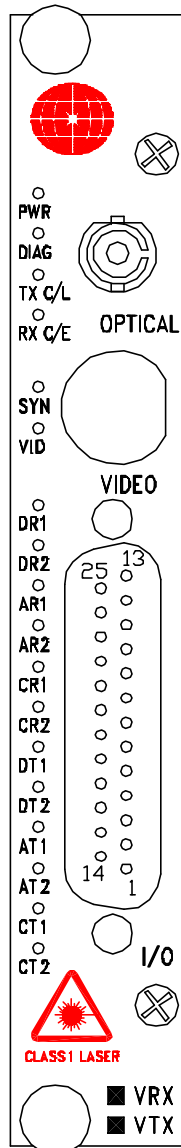

OPTICAL PORT (ST, FC)

AUDIO/DATA INPUT/OUTPUT (DB-25 FEMALE)

4. (CH.1) RS232 INPUT / RS422 INPUT- / RS485 (4W) INPUT-
 / (CH.1) RS485 (2W) INPUT/OUTPUT-
16. (CH.1) RS422 INPUT+ / RS485 (4W) INPUT+
 / (CH.1) RS485 (2W) INPUT/OUTPUT+
2. (CH.2) RS232 INPUT / RS422 INPUT-
14. (CH.2) RS422 INPUT+
5. (CH.1) RS232 OUTPUT / RS422 OUTPUT- / RS485 (4W) OUTPUT-
17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+(4W)
3. (CH.2) RS232 OUTPUT / RS422 OUTPUT-
15. (CH.2) RS422 OUTPUT+
1. GND
7. GND