


SXA/SXB-2G/2G-XSD

PINOUT DIAGRAM

DR1 - (CH.1) DATA OUTPUT
 DR2 - (CH.2) DATA OUTPUT
 AR1 - NA
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - (CH.2) DATA INPUT
 AT1 - NA
 AT2 - NA
 CT1 - NA
 CT2 - NA

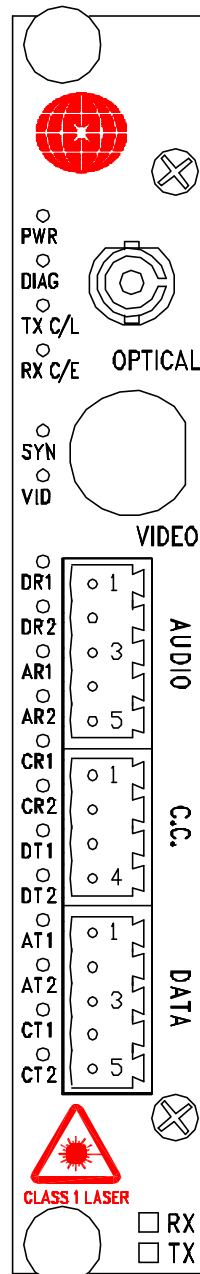

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - GREEN-OK, RED-ALARM

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

SYN - NA

VID - NA

AUDIO/DATA INPUT/OUTPUT

1. (CH.2) RS232 INPUT / RS422 INPUT-
2. (CH.2) RS422 INPUT+
3. (CH.2) RS232 OUTPUT / RS422 OUTPUT-
4. (CH.2) RS422 OUTPUT+
5. GND

CC N/A

DATA INPUT/OUTPUT

1. (CH.1) RS232 INPUT / RS422 INPUT- / RS485 INPUT-(4W)
/ RS485 (2W) INPUT/OUTPUT-
2. (CH.1) RS422 INPUT+ / RS485 INPUT+(4W)
/ RS485 (2W) INPUT/OUTPUT+
3. (CH.1) RS232 OUTPUT / RS422 OUTPUT- / RS485 OUTPUT-(4W)
4. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+(4W)
5. GND