

SXA/SXB-2G/2G-XS


PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - CARD DIAGNOSTIC*
 (GREEN-OK, RED-ALARM)
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)
 SYN - NA
 VID - NA

STATUS INDICATORS

1 - (CH.1) DATA OUTPUT
 2 - (CH.2) DATA OUTPUT
 3 - NA
 4 - NA
 5 - NA
 6 - NA
 7 - (CH.1) DATA INPUT
 8 - (CH.2) DATA INPUT
 9 - NA
 10 - NA
 11 - NA
 12 - NA

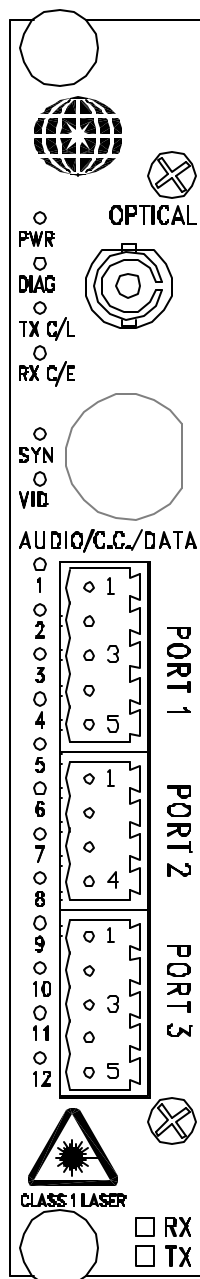

OPTICAL PORT (ST, FC)

PORT 1 DATA INPUT/OUTPUT

1. (CH.2) RS232 INPUT / RS422 INPUT-
2. (CH.2) RS422 INPUT+
3. (CH.2) RS232 OUTPUT / RS422 OUTPUT-
4. (CH.2) RS422 OUTPUT+
5. GND

PORT 2 N/A

PORT 3 DATA INPUT/OUTPUT

1. (CH.1) RS232 INPUT / RS422 INPUT-
/RS485 (4W) INPUT- /RS485 (2W) INPUT/OUTPUT-
2. (CH.1) RS422 INPUT+ / RS485 INPUT+(4W)
/ RS485 (2W) INPUT/OUTPUT+
3. (CH.1) RS232 OUTPUT / RS422 OUTPUT-
/ RS485 (4W) OUTPUT-
4. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+(4W)
5. GND

MERIDIAN TECHNOLOGIES INC.
 700 ELMONT ROAD, ELMONT, N.Y. 11003
 Support: 516-285-1000,
 919-847-6638
 WWW.MERIDIAN-TECH.COM

* CARD DIAGNOSTIC IF APPLICABLE

FILE NAME: SXASXB-2G-2G-XSD.DWG
 05/29/2013 V.1