

SXA/SXB-4C/4C-X

PINOUT DIAGRAM

STATUS INDICATORS


PWR - POWER (GREEN)
 DIAG - CARD DIAGNOSTIC*
 (GREEN-OK, RED-ALARM)
 TX C/L - TX CARRIER (GREEN)
 /ALARM (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)

CC1 - (CH.1) CC INPUT
 CC2 - (CH.2) CC INPUT
 CC3 - (CH.3) CC INPUT
 CC4 - (CH.4) CC INPUT
 CC5 - NA
 CC6 - NA
 CC7 - NA
 CC8 - NA
 CC9 - (CH.4) CC OUTPUT
 CC10 - (CH.3) CC OUTPUT
 CC11 - (CH.2) CC OUTPUT
 CC12 - (CH.1) CC OUTPUT

OPTICAL PORT (ST, FC)

CC INPUT/OUTPUT
 (DB-25 FEMALE)

12. (CH.1) CC INPUT
 25. (CH.1) CC GND
 11. (CH.2) CC INPUT
 24. (CH.2) CC GND
 10. (CH.3) CC INPUT
 23. (CH.3) CC GND
 9. (CH.4) CC INPUT
 22. (CH.4) CC GND
 8. NA
 21. NA
 7. NA
 20. NA
 6. NA
 19. NA
 5. NA
 18. NA
 4. (CH.4) CC OUTPUT
 17. (CH.4) CC OUTPUT
 3. (CH.3) CC OUTPUT
 16. (CH.3) CC OUTPUT
 2. (CH.2) CC OUTPUT
 15. (CH.2) CC OUTPUT
 1. (CH.1) CC OUTPUT
 14. (CH.1) CC OUTPUT

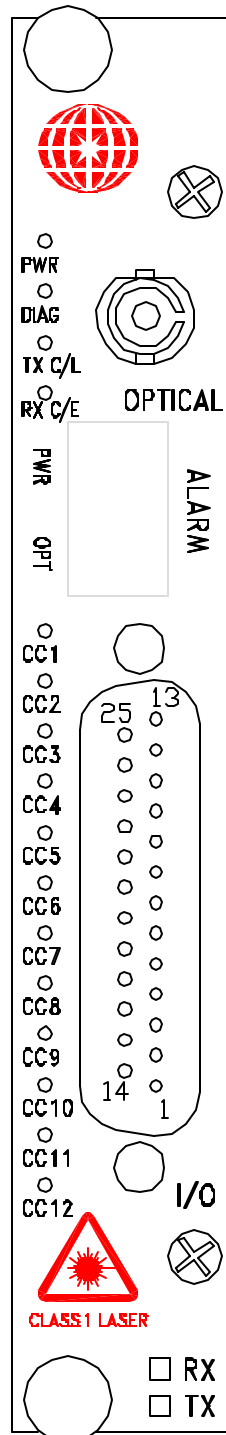

MERIDIAN TECHNOLOGIES INC.
 700 ELMONT ROAD, ELMONT, N.Y. 11003
 Support: 516-285-1000, 919-847-6638

WWW.MERIDIAN-TECH.COM

FILE NAME: SX-6C-6C.DWG

11/28/2012 V.0

*D - CARD DIAGNOSTIC IF APPLICABLE