

SXA-4D/4D-X, SXB-4D/4D-X


PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - CARD DIAGNOSTIC*
 (GREEN-OK, RED-ALARM)
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)

SYN - NA
 VID - NA

- 1 - (CH.1) DATA OUTPUT
- 2 - (CH.2) DATA OUTPUT
- 3 - NA
- 4 - NA
- 5 - (CH.3) DATAOUTPUT
- 6 - (CH.4) DATA OUTPUT
- 7 - (CH.1) DATA INPUT
- 8 - (CH.2) DATA INPUT
- 9 - NA
- 10 - NA
- 11 - (CH.3) DATA INPUT
- 12 - (CH.4) DATA INPUT

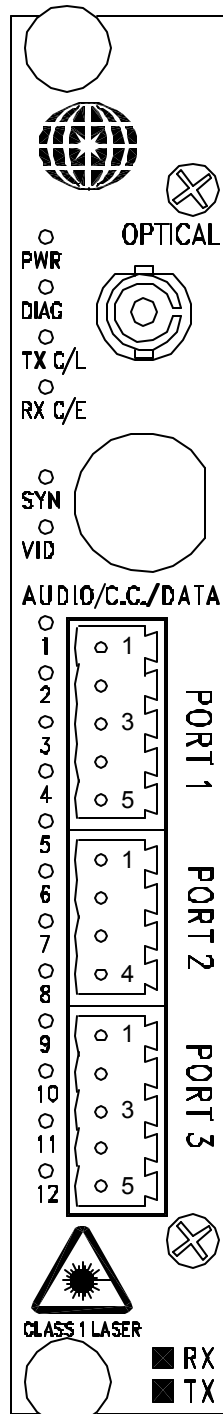

OPTICAL PORT (ST, FC)

PORT 1 NA

PORT 2 DATA OUTPUT

- 1. (CH.1) RS232 OUTPUT
- 2. (CH.2) RS232 OUTPUT
- 3. (CH.3) RS232 OUTPUT
- 4. (CH.4) RS232 OUTPUT

PORT 3 DATA INPUT

- 1. (CH.1) RS232 INPUT
- 2. (CH.2) RS232 INPUT
- 3. (CH.3) RS232 INPUT
- 4. (CH.4) RS232 INPUT
- 5. GND

* CARD DIAGNOSTIC IF APPLICABLE

MERIDIAN TECHNOLOGEIS INC.
 700 ELMONT ROAD, ELMONT, N.Y. 11003
 Support: 516-285-1000, 919-847-6638
 WWW.MERIDIAN-TECH.COM