

SXA/SXB-4D/4D-XS

PINOUT DIAGRAM


STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - CARD DIAGNOSTIC*
 (GREEN-OK, RED-ALARM)
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)

SYN - NA
 VID - NA

STATUS INDICATORS

1 - (CH.1) DATA OUTPUT
 2 - (CH.2) DATA OUTPUT
 3 - NA
 4 - NA
 5 - (CH.3) DATAOUTPUT
 6 - (CH.4) DATA OUTPUT
 7 - (CH.1) DATA INPUT
 8 - (CH.2) DATA INPUT
 9 - NA
 10 - NA
 11 - (CH.3) DATA INPUT
 12 - (CH.4) DATA INPUT

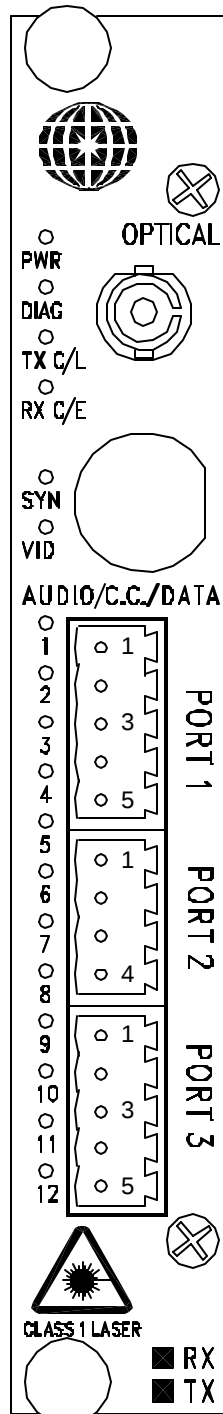

OPTICAL PORT (ST, FC)

PORT 1 NA

PORT 2 DATA OUTPUT

1. (CH.1) RS232 OUTPUT
 2. (CH.2) RS232 OUTPUT
 3. (CH.3) RS232 OUTPUT
 4. (CH.4) RS232 OUTPUT

PORT 3 DATA INPUT

1. (CH.1) RS232 INPUT
 2. (CH.2) RS232 INPUT
 3. (CH.3) RS232 INPUT
 4. (CH.4) RS232 INPUT
 5. GND

MERIDIAN TECHNOLOGEIS INC.
 700 ELMONT ROAD, ELMONT, N.Y. 11003
 Support: 516-285-1000, 919-847-6638

WWW.MERIDIAN-TECH.COM

* CARD DIAGNOSTIC IF APPLICABLE

FILE NAME: SXASXB-4D-4D-XS.DWG
 07/24/2013 V.1