


SXA/SXB-6C/6C-X

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)
 SYN - NA
 VID - NA

DR1 - (CH.1) CC INPUT
 DR2 - (CH.2) CC INPUT
 AR1 - (CH.3) CC INPUT
 AR2 - (CH.4) CC INPUT
 CR1 - (CH.5) CC INPUT
 CR2 - (CH.6) CC INPUT
 DT1 - (CH.6) CC OUTPUT
 DT2 - (CH.5) CC OUTPUT
 AT1 - (CH.4) CC OUTPUT
 AT2 - (CH.3) CC OUTPUT
 CT1 - (CH.2) CC OUTPUT
 CT2 - (CH.1) CC OUTPUT

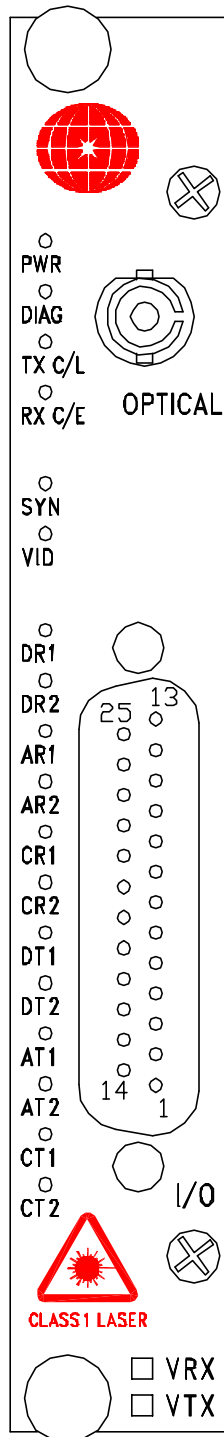

OPTICAL PORT (ST, FC)

CC INPUT/OUTPUT
(DB-25 FEMALE)

12. (CH.1) CC INPUT
 25. (CH.1) CC GND
 11. (CH.2) CC INPUT
 24. (CH.2) CC GND
 10. (CH.3) CC INPUT
 23. (CH.3) CC GND
 9. (CH.4) CC INPUT
 22. (CH.4) CC GND
 8. (CH.5) CC INPUT
 21. (CH.5) CC GND
 7. (CH.6) CC INPUT
 20. (CH.6) CC GND
 6. (CH.6) CC OUTPUT
 19. (CH.6) CC OUTPUT
 5. (CH.5) CC OUTPUT
 18. (CH.5) CC OUTPUT
 4. (CH.4) CC OUTPUT
 17. (CH.4) CC OUTPUT
 3. (CH.3) CC OUTPUT
 16. (CH.3) CC OUTPUT
 2. (CH.2) CC OUTPUT
 15. (CH.2) CC OUTPUT
 1. (CH.1) CC OUTPUT
 14. (CH.1) CC OUTPUT