

# DT-1DV2A-0

## PINOUT DIAGRAM

### ST-2A-1

OPTICAL PORT (ST, FC)

STATUS INDICATORS


PWR - POWER (GREEN)  
 DIAG - NA  
 TX C/L - TX CARRIER (GREEN)  
 / OVERLOAD (RED)  
 RX C/E - RX CARRIER (GREEN)  
 / ERROR (RED)  
 SYN - NA  
 VID - NA

AUDIO INPUT

1. (CH.1) AUDIO INPUT-
2. (CH.1) AUDIO INPUT+
3. (CH.2) AUDIO INPUT-
4. (CH.2) AUDIO INPUT+
5. GND

STATUS INDICATORS

DR1 - NA  
 DR2 - NA  
 AR1 - NA  
 AR2 - NA  
 CR1 - NA  
 CR2 - NA  
 DT1 - NA  
 DT2 - NA  
 AT1 - (CH.1) AUDIO INPUT  
 AT2 - (CH.2) AUDIO INPUT  
 CT1 - NA  
 CT2 - NA

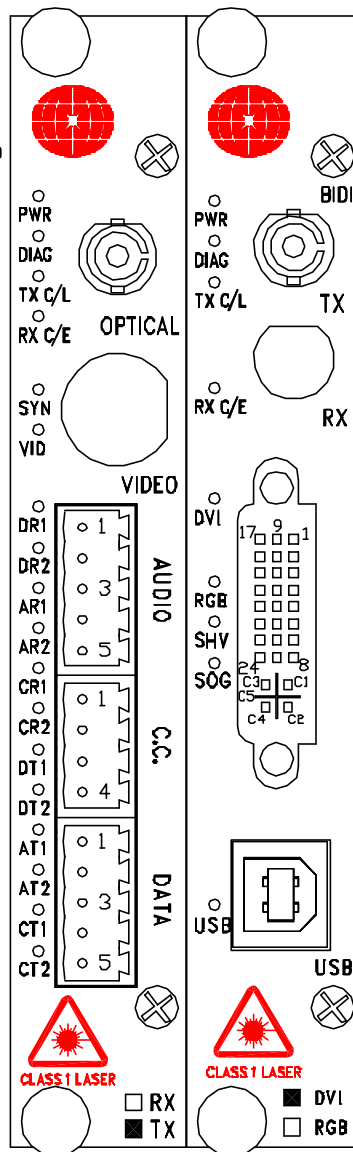

### ST-1DV-0

STATUS INDICATORS

PWR - POWER (GREEN)  
 DIAG - NA

OPTICAL PORT (ST)

TX C/L - TX CARRIER (GREEN)  
 /OVERLOAD (RED)  
 RX C/E - RX CARRIER  
 (GREEN)/ERROR (RED)

DVI INPUT/OUTPUT  
 (DVI FEMALE)

1. TMDS DATA 2 -
2. TMDS DATA 2 +
3. TMDS DATA 2/4 SHIELD
4. TMDS DATA 3 -
5. TMDS DATA 4 +
6. DDC CLOCK
7. DDC DATA
8. NA
9. TMDS DATA 1 -
10. TMDS DATA 1 +
11. TMDS DATA 1/3 SHIELD
12. TMDS DATA 3 -
13. TMDS DATA 3 +
14. +5V POWER
15. GND
16. HOT PLUG DETECT
17. TMDS DATA 0 -
18. TMDS DATA 0 +
19. TMDS DATA 0/5 SHIELD
20. TMDS DATA 5 -
21. TMDS DATA 5 +
22. TMDS CLOCK SHIELD
23. TMDS CLOCK+
24. TMDS CLOCK-

STATUS INDICATORS

DVI - DVI PORT ACTIVE (GREEN)  
 RGB - NA  
 SHV - NA  
 SOG - NA

USB INPUT (TYPE B)

STATUS INDICATORS

USB -USB ACTIVE (GREEN/RED)

MERIDIAN TECHNOLOGIES INC.  
 700 ELMONT ROAD, ELMONT, N.Y. 11003  
 Support: 516-285-1000,  
 919-847-6638, 858-605-1070  
 WWW.MERIDIAN-TECH.COM

FILE NAME: DTDR-1DV2A.DWG  
 06/10/09 V.0

# DR-1DV2A-0

## PINOUT DIAGRAM

SR-2A-1

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN)  
/ OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN)  
/ ERROR (RED)

SYN - NA

VID - NA

AUDIO OUTPUT

1. (CH.1) AUDIO OUTPUT-
2. (CH.1) AUDIO OUTPUT+
3. (CH.2) AUDIO OUTPUT-
4. (CH.2) AUDIO OUTPUT+
5. GND

STATUS INDICATORS

DR1 - NA

DR2 - NA

AR1 - (CH.1) AUDIO OUTPUT

AR2 - (CH.2) AUDIO OUTPUT

CR1 - NA

CR2 - NA

DT1 - NA


DT2 - NA

AT1 - NA

AT2 - NA

CT1 - NA

CT2 - NA

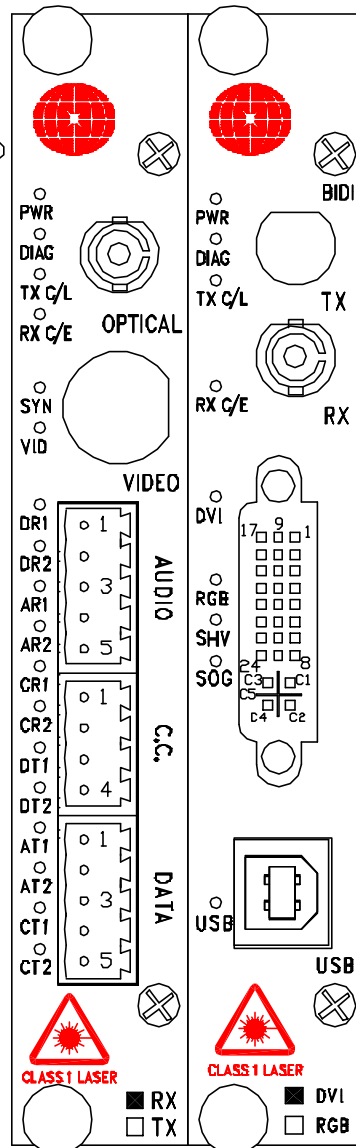

SR-1DV-0

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

OPTICAL PORT (ST)

STATUS INDICATORS

TX C/L - TX CARRIER (GREEN)  
/ OVERLOAD (RED)

RX C/E - RX CARRIER  
(GREEN)/ERROR (RED)

DVI INPUT/OUTPUT  
(DVI FEMALE)

1. TMDS DATA 2 -
2. TMDS DATA 2 +
3. TMDS DATA 2/4 SHIELD
4. TMDS DATA 3 -
5. TMDS DATA 4 +
6. DDC CLOCK
7. DDC DATA
8. NA
9. TMDS DATA 1 -
10. TMDS DATA 1 +
11. TMDS DATA 1/3 SHIELD
12. TMDS DATA 3 -
13. TMDS DATA 4 +
14. +5V POWER
15. GND
16. HOT PLUG DETECT
17. TMDS DATA 0 -
18. TMDS DATA 0 +
19. TMDS DATA 0/5 SHIELD
20. TMDS DATA 5 -
21. TMDS DATA 5 +
22. TMDS CLOCK SHIELD
23. TMDS CLOCK+
24. TMDS CLOCK-

STATUS INDICATORS

DVI - DVI PORT ACTIVE (GREEN)

RGB - NA

SHV - NA

SDG - NA

USB INPUT (TYPE B)

STATUS INDICATOR

USB - USB ACTIVE (GREEN/RED)

MERIDIAN TECHNOLOGIES INC.  
700 ELMONT ROAD, ELMONT, N.Y. 11003

Support: 516-285-1000,  
919-847-6638, 858-605-1070  
WWW.MERIDIAN-TECH.COM

FILE NAME: D1DR-1DV2A.DWG  
06/10/09 V.0