

DT-4U1F1K/1F1K-X
 DT-4V1F1K/1F1K-X
 DT-4W1F1K/1F1K-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO INPUT (CH.3)

STATUS INDICATORS


1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA RS422 IN/OUT (PORT 3) (DB-9 FEMALE)

1. (CH.1) INPUT +
2. (CH.1) INPUT -
3. NA
4. NA
5. GND
6. (CH.1) OUTPUT +
7. (CH.1) OUTPUT -
8. NA
9. NA

DATA RS485 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) OUTPUT+
2. (CH.1) OUTPUT-
3. NA
4. NA
5. GND
6. (CH.1) INPUT+
7. (CH.1) INPUT-
8. NA
9. NA

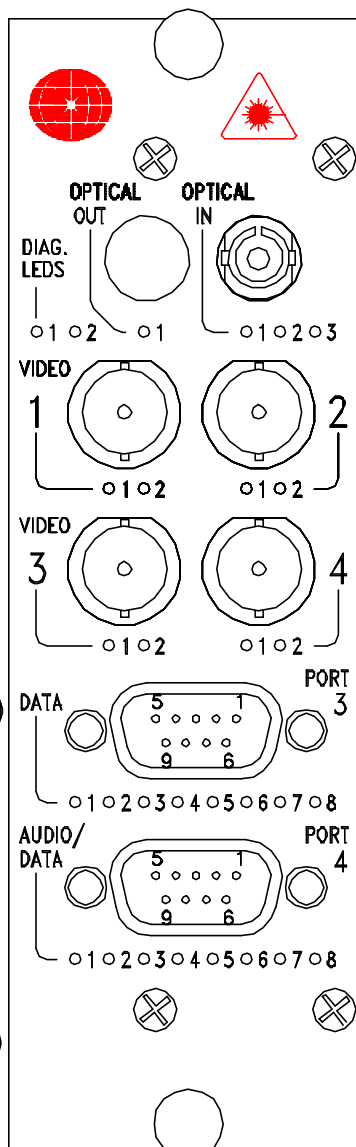

OPTICAL PORT STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.2) STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO INPUT (CH.4) STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 3)

1. (CH.1) DATA INPUT
2. NA
3. NA
4. NA
5. NA
6. (CH.1) DATA OUTPUT
7. NA
8. NA

STATUS INDICATORS (PORT 4)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. NA
5. (CH.1) DATA INPUT
6. NA
7. NA
8. NA

*U-10MHz, 10 BIT VIDEO
 *V-8 BIT VIDEO
 *W-10 BIT VIDEO

DR-4U1F1K/1F1K-X
 DR-4V1F1K/1F1K-X
 DR-4W1F1K/1F1K-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO OUTPUT (CH.3)

STATUS INDICATORS


1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA RS422 IN/OUT (PORT 3) (DB-9 FEMALE)

1. (CH.1) OUTPUT +
2. (CH.1) OUTPUT -
3. NA
4. NA
5. GND
6. (CH.1) INPUT +
7. (CH.1) INPUT -
8. NA
9. NA

DATA RS485 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) INPUT+
2. (CH.1) INPUT-
3. NA
4. NA
5. GND
6. (CH.1) OUTPUT+
7. (CH.1) OUTPUT-
8. NA
9. NA

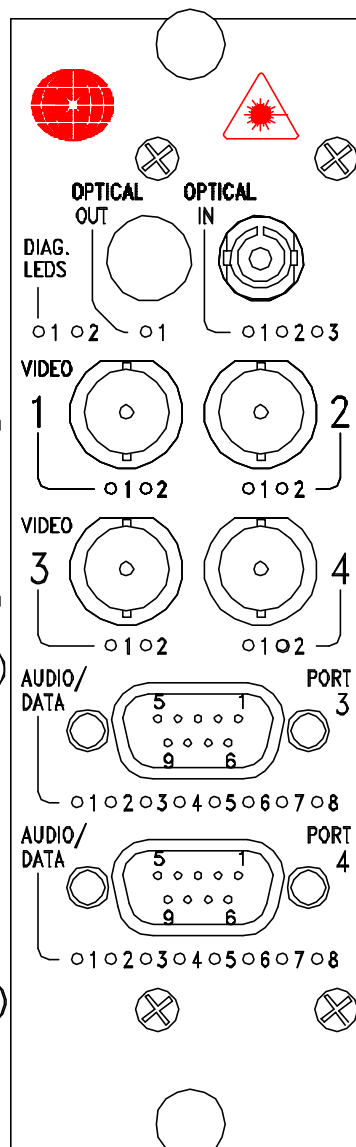

OPTICAL PORT STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO OUTPUT (CH.4)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 3)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. NA
5. (CH.1) DATA INPUT
6. NA
7. NA
8. NA

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. NA
4. NA
5. NA
6. (CH.1) DATA OUTPUT
7. NA
8. NA

*U-10MHz, 10 BIT VIDEO
 *V-8 BIT VIDEO
 *W-10 BIT VIDEO