

DT-4U4C2F/2F-XD DT-4V4C2F/2F-XD DT-4W4C2F/2F-XD

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. CARD DIAGNOSTIC (GREEN-OK / RED-ALLARM)

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO INPUT (CH.3)

STATUS INDICATORS


1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA INPUT (PORT 3) (HD-15 FEMALE)

1. (CH.1) INPUT
2. (CH.2) INPUT
3. (CH.3) INPUT
4. (CH.4) INPUT
5. GND
- 6.-15. NA

DATA RS422 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) INPUT +
2. (CH.1) INPUT -
3. (CH.2) INPUT +
4. (CH.2) INPUT -
5. GND
6. (CH.1) OUTPUT +
7. (CH.1) OUTPUT -
8. (CH.2) OUTPUT +
9. (CH.2) OUTPUT -

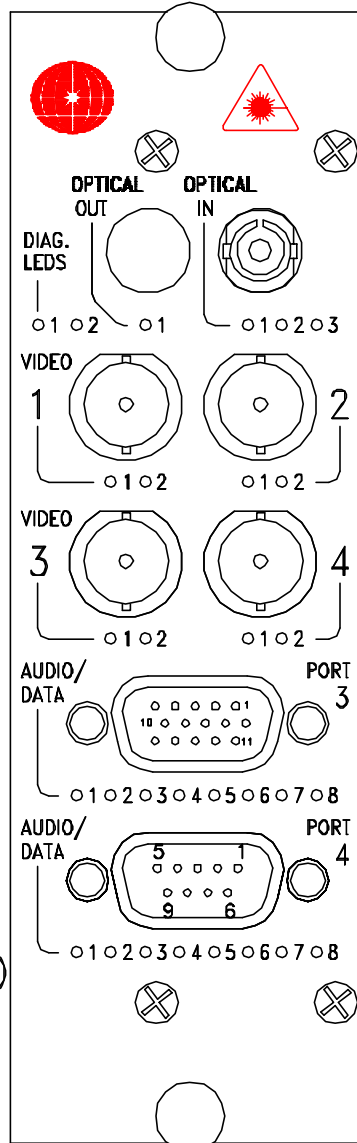

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO INPUT (CH.4)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 3)

1. (CH.1) INPUT PRESENT
2. (CH.2) INPUT PRESENT
3. (CH.3) INPUT PRESENT
4. (CH.4) INPUT PRESENT
5. NA
6. NA
7. NA
8. NA


STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. (CH.2) DATA INPUT
4. NA
5. NA
6. (CH.1) DATA OUTPUT
7. NA
8. (CH.2) DATA OUTPUT

DR-4U4C2F/2F-XD DR-4V4C2F/2F-XD DR-4W4C2F/2F-XD

PINOUT DIAGRAM

- STATUS INDICATORS**
1. POWER (GREEN)
 2. CARD DIAGNOSTIC (GREEN-OK / RED-ALLARM)
- STATUS INDICATORS**
1. TX CARRIER (GREEN)/ERROR (RED)
- VIDEO OUTPUT (CH.1)**
- STATUS INDICATORS**
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- VIDEO OUTPUT (CH.3)**
- STATUS INDICATORS**
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- DATA OUTPUT (PORT 3)**
(HD-15 FEMALE)
1. (CH.1) OUTPUT
 2. (CH.1) OUTPUT
 3. (CH.2) OUTPUT
 4. (CH.2) OUTPUT
 5. GROUND
 6. (CH.3) OUTPUT
 7. (CH.3) OUTPUT
 8. (CH.4) OUTPUT
 9. (CH.4) OUTPUT
 - 10.-15. NA
- DATA RS422 IN/OUT (PORT 4)**
(DB-9 FEMALE)
1. (CH.1) OUTPUT +
 2. (CH.1) OUTPUT -
 3. (CH.2) OUTPUT +
 4. (CH.2) OUTPUT -
 5. GND
 6. (CH.1) INPUT +
 7. (CH.1) INPUT -
 8. (CH.2) INPUT +
 9. (CH.2) INPUT -

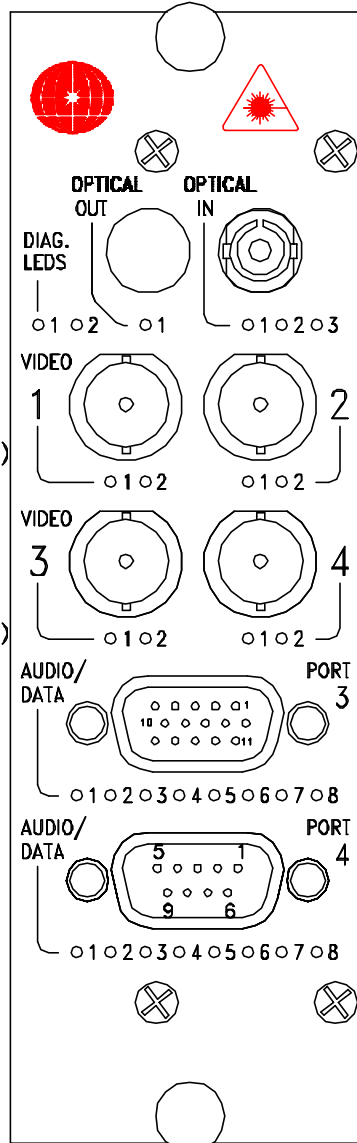

- OPTICAL PORT**
- STATUS INDICATORS**
1. NA
 2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
 3. RX CARRIER (GREEN)/ERROR (RED)
- VIDEO OUTPUT (CH.2)**
- STATUS INDICATORS**
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- VIDEO OUTPUT (CH.4)**
- STATUS INDICATORS**
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- STATUS INDICATORS (PORT 3)**
1. (CH.1) OUTPUT PRESENT
 2. (CH.2) OUTPUT PRESENT
 3. (CH.3) OUTPUT PRESENT
 4. (CH.4) OUTPUT PRESENT
 5. NA
 6. NA
 7. NA
 8. NA
- STATUS INDICATORS (PORT 4)**
1. NA
 2. (CH.1) DATA OUTPUT
 3. NA
 4. (CH.2) DATA OUTPUT
 5. (CH.1) DATA INPUT
 6. NA
 7. (CH.2) DATA INPUT
 8. NA